

READ THIS FIRST


BEFORE YOU START

- Ensure pool lights are turned off and system is isolated.
 - Confirm existing transformer is a **12v AC ONLY**, magnetic type safety isolating transformer and is in good working order (if in doubt contact Spa Electrics or your preferred registered electrician).
 - Installation of the EMRX Light requires connection to a **low voltage circuit (12v AC) ONLY**. No work should be carried out on mains voltage (240v) systems unless done so by a registered electrician in accordance with AS/NZS 3000:2007 (current amendment) standards.
 - For safe and proper installation, ensure that only those parts supplied with the system are used.
 - Check that there is enough cable behind the existing light to allow for cable connection above water. If enough cable is not available, water level must be lowered to connect EMRX light.
 - Ensure pool light cable is circular and free of damage or imperfections i.e. cuts, cracks or deformation.
 - If possible, trim cable back until a fresh end of cable is available.
 - This manual is to be used in conjunction with the supplied EMRX installation manual.
- For any further information please contact Spa Electrics (03) 9793 2299

INSTALLATION


1 ADAPTOR INSTALLATION

- 1 FIT ADAPTOR PLATE TO SLX/DELTA/ARC NICHE USING EXISTING SCREWS, ALIGNING THE SLOTS ON THE ADAPTOR TO THE KEYWAYS OF THE NICHE

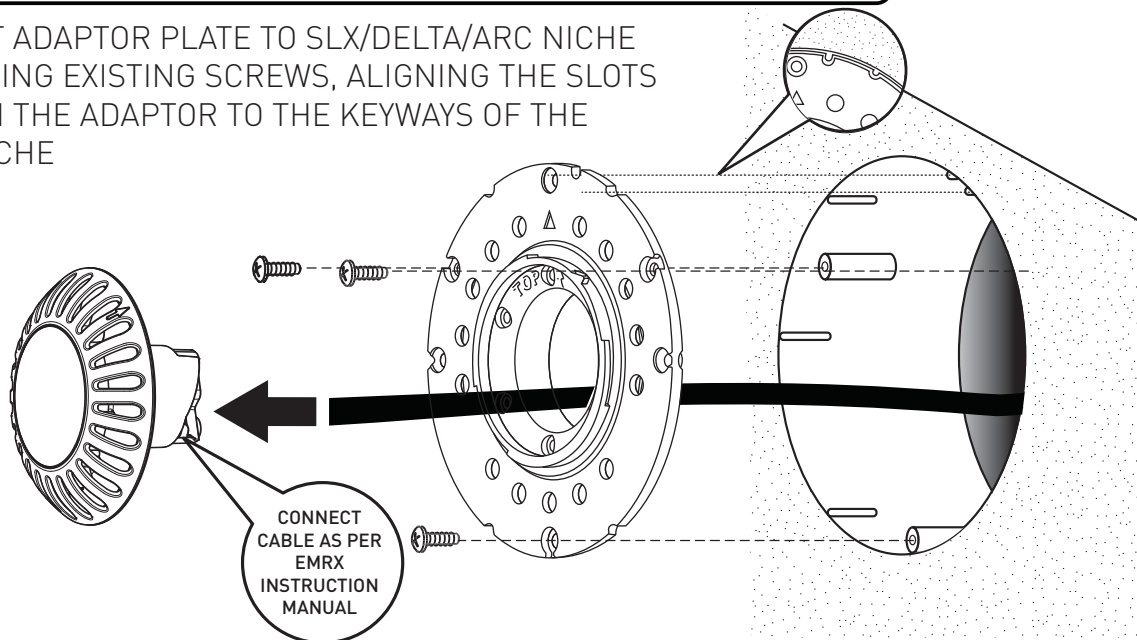


2 LIGHT INSTALLATION

- 1 ALIGN RED BUTTON WITH 'TOP' MARKING ON ADAPTOR TO ENGAGE IN BAYONET LOCK

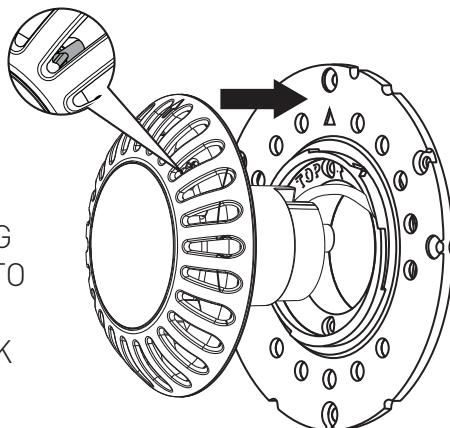

- 2 ROTATE LIGHT CLOCKWISE TO LOCK INTO POSITION

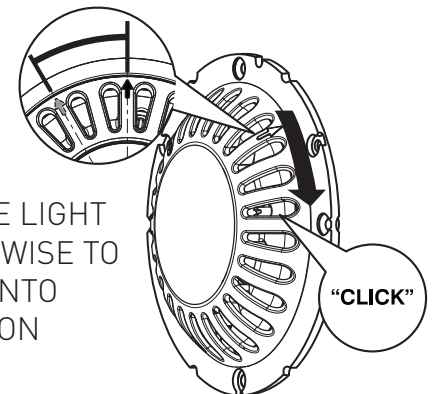

READ THIS FIRST


BEFORE YOU START

- Ensure pool lights are turned off and system is isolated.
 - Confirm existing transformer is a **12v AC ONLY**, magnetic type safety isolating transformer and is in good working order (if in doubt contact Spa Electrics or your preferred registered electrician).
 - Installation of the EMRX Light requires connection to a **low voltage circuit (12v AC) ONLY**. No work should be carried out on mains voltage (240v) systems unless done so by a registered electrician in accordance with AS/NZS 3000:2007 (current amendment) standards.
 - For safe and proper installation, ensure that only those parts supplied with the system are used.
 - Check that there is enough cable behind the existing light to allow for cable connection above water. If enough cable is not available, water level must be lowered to connect EMRX light.
 - Ensure pool light cable is circular and free of damage or imperfections i.e. cuts, cracks or deformation. If possible, trim cable back until a fresh end of cable is available.
 - This manual is to be used in conjunction with the supplied EMRX installation manual.
- For any further information please contact Spa Electrics (03) 9793 2299

INSTALLATION


1 ADAPTOR INSTALLATION

- 1 FIT ADAPTOR PLATE TO AQUASTAR NICHE USING EXISTING SCREWS

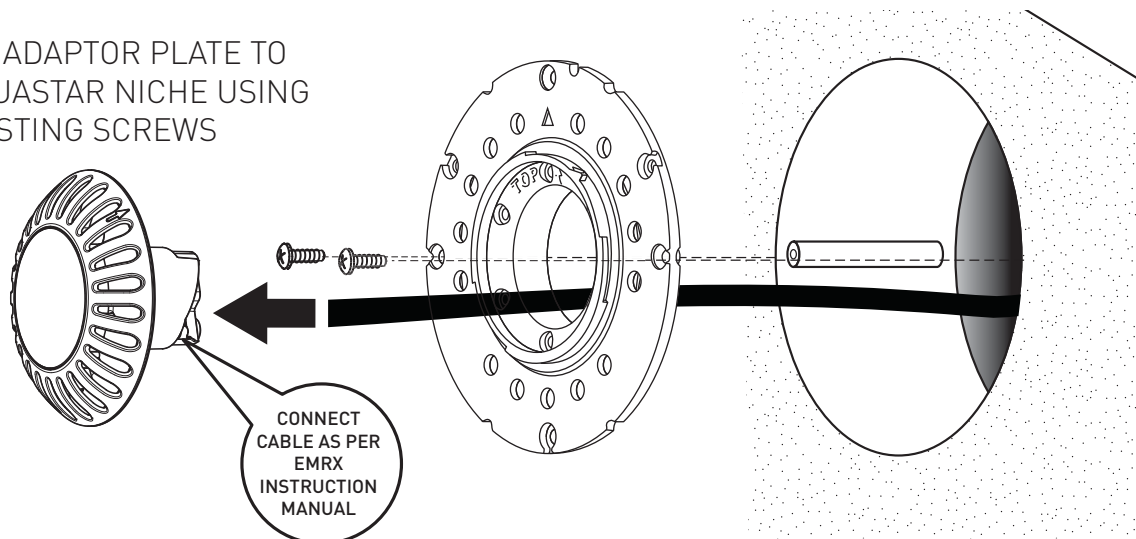

2 LIGHT INSTALLATION

- 1 ALIGN RED BUTTON WITH 'TOP' MARKING ON ADAPTOR TO ENGAGE IN BAYONET LOCK

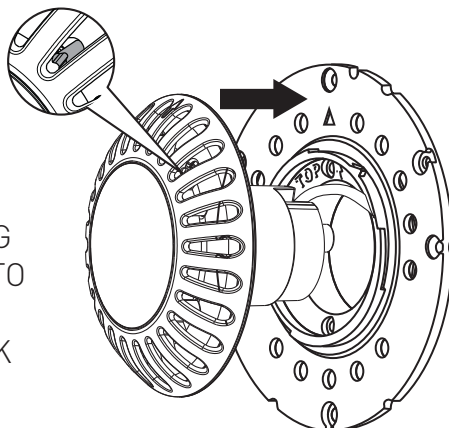

- 2 ROTATE LIGHT CLOCKWISE TO LOCK INTO POSITION

